



HOSHIZAKI


Undercounter Cube Ice Maker IM-30CNE / IM-45CNE



DESCRIPTION

- Enclosed water circuit offers the ultimate contamination protection by reducing the number of points so that impurities cannot enter the ice making process;
- Microcomputer control during the ice making process to perform at its best under varying circumstances, without having to make physical adjustments;
- Stainless steel exterior with integrated door handles provides a hygienic and high quality finish;
- Foam injected polyurethane (HFC free) for insulation, helps preserve the quality and consistency of the ice produced, reducing the number of production cycles;
- An easily cleanable air filter allows end users to carry out a routine cleaning schedule, extending product life expectancy and reducing the frequency and costs of maintenance call-outs;
- Removable door gaskets help prevent any heat and contamination from entering the ice bin.

PRODUCT DRAWINGS

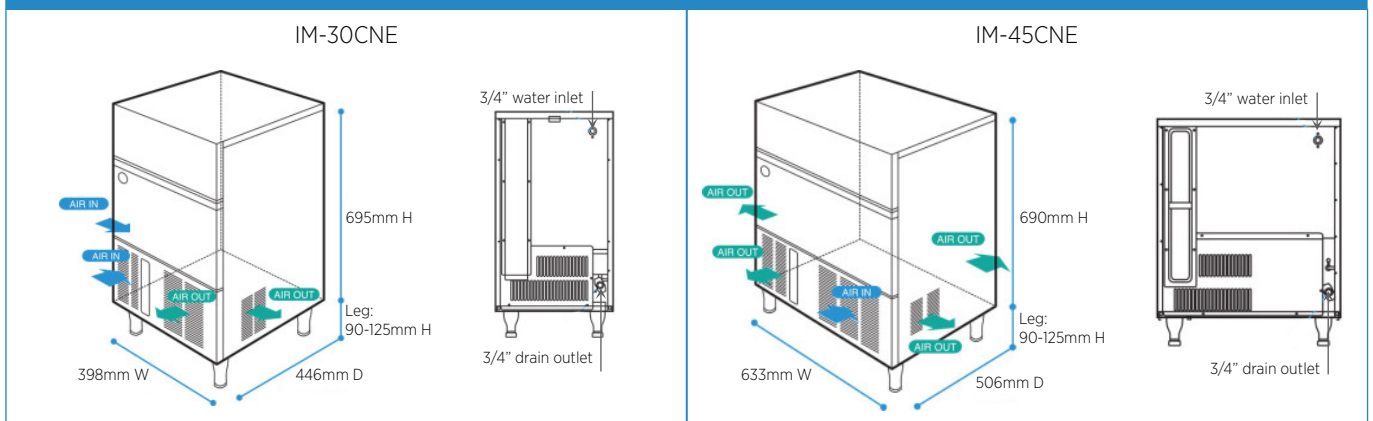

PRODUCT SPECIFICATIONS

Model	IM-30CNE	IM-45CNE
Cooling system	Air cooled	Air cooled
Ice cube dimension	28 x 28 x 32 mm	28 x 28 x 32
Ice production per day	24 kg (at 21°C C/WT 15 °C)	40 kg (at 21°C C/WT 15 °C)
Water consumption per day	0.06 m ³	0.10 m ³
Ice production - freeze cycle time	24 min.	28 min.
Ice production - per cycle	0.4 kg (18 pcs)	0.67 kg (30 pcs)
Storage capacity	11.5 kg	15 kg
Ice bin	Self contained	Self contained
Refrigerant	R134a	R134a
Water inlet and drain	3/4" inlet & drain	3/4" inlet & drain
Elect. loading	220V / 50 Hz / 1ph, 270W	220V / 50 Hz / 1ph, 320W
Dimension (W x D x H)	398 x 446 x 695 + 90-125 mm	633 x 506 x 690 + 90-125 mm
Net weight	34 kg	48 kg